

JA-60V

(43-48)

OPTEX () ,

JA-6X.

3 V - 2 AAA 1.5

1
433.92 M

10
100

()
Optex VX 402R

12 / 90 ,14

0,8 - 1,2

0,3 - 1,5 /


5 120

IV (EN 50131-1)
-20°C +50°C
IP54
95%
198 x 80 x 108
2 (EN 50131-1)
ERC/REC 70-03
JA-60V



Jablotron Ltd.
Directive 1999/5/EC.

www.jablotron.cz

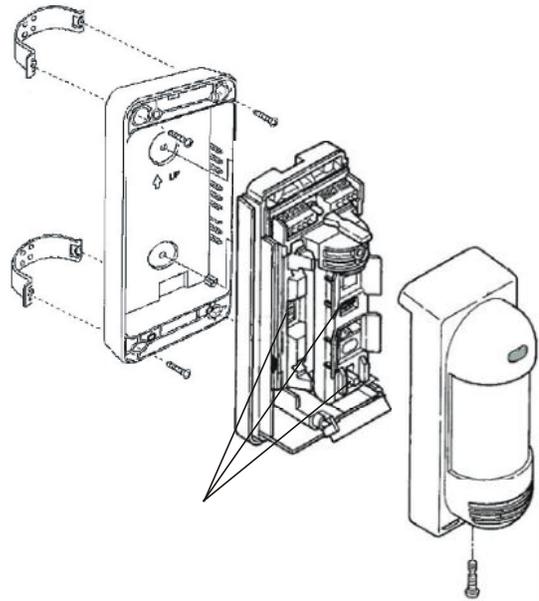


JA-60V,

,2

- 1.
- 2.
- 3.
- 4.

0,8 1,2

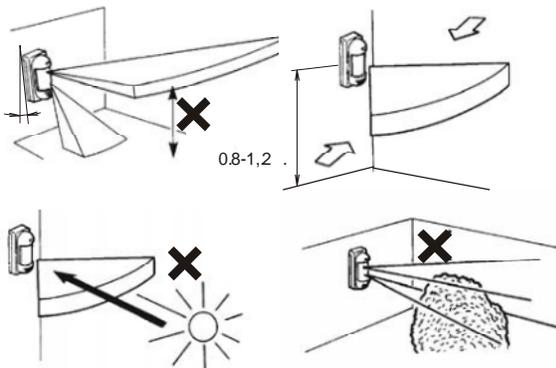


- 1.
- 2.

PIR

()

).




JA-60N



(ON)
(1)

2

ON.

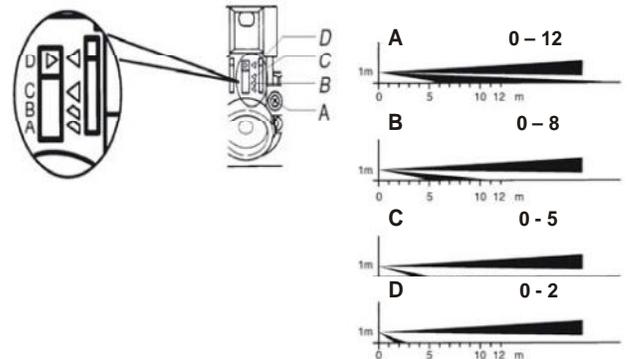

	M	
A	12	10.0 15.0
B	8	6.0 10.0
C	5	4.0 5.5
D	2	1.5 2.5

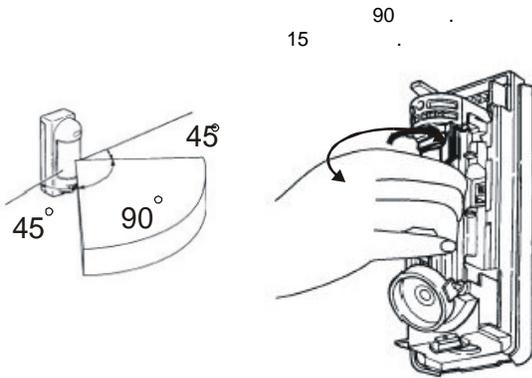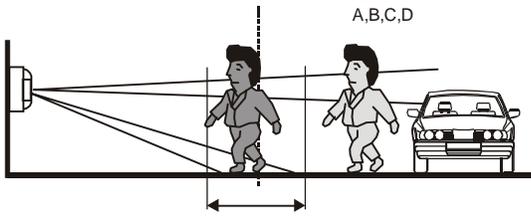


SENS:
L -
M -
H -



5/120

(4)

	()	
	(L)	() H M

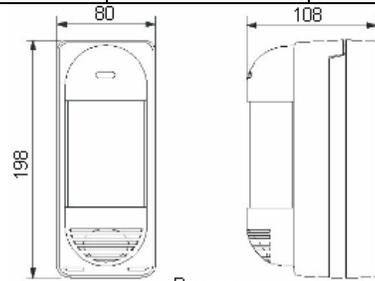

Pod Skalkou 33
466 01 Jablonec nad Nisou
Czech Republic
Tel.: 483 559 911
fax: 483 559 993
Internet: www.jablotron.com